


CL 439

Manufactured in Delta, BC



FINISH	MATERIAL GAUGE			LENGTH
	26	24	22	
GALVALUME	•	•	•	6' to 35'
GALVANIZED	•	•	•	6' to 35'
PRE-PAINTED GALVANIZED	•	•	•	6' to 35'

STEEL:

- Galvanized and Galvalume
- Pre-painted Galvanized WeatherXL™ series (see Vicwest standard colors).



MATERIAL SPECIFICATIONS:

The steel used to manufacture CL 439 sheet meets the following specifications:

- ASTM A792 Grade 33 (latest revision) with designation AZ50 (AZM150) for Galvalume material.
- ASTM A653 SS, Grade 33 (latest revision) with designation Z275 for Galvanized material.
- ASTM A653 SS, Grade 33 (latest revision) with designation Z180 or Z275 for pre-painted Galvanized material.

For a more subdued shadow effect, Vicwest's CL 439 panel is an ideal choice. The narrow 1 3/8" deep ribs are spaced at 13 1/8" centre to centre. This pattern creates a subtle refined shadow line which will enhance the appearance of your project.

ENGINEERING LOAD TABLES

Minimum 3 Span condition

SPAN (INCHES)	ALLOWABLE LOAD lbs/sq. ft.		
	26 GA.	24 GA.	22 GA.
36	33	65	90
42	28	56	77
48	25	49	67
54	22	39	53

ESTIMATING CHART


Coverage @ 39.375" (1.0 m) per sheet:

No. OF SHEETS	COVERAGE			No. OF SHEETS	COVERAGE			No. OF SHEETS	COVERAGE		
	FT.	INS.	M		FT.	INS.	M		FT.	INS.	M
1	3	3.375	1	16	52	6.0	16	31	101	8.625	31
2	6	6.75	2	17	55	9.375	17	32	105	0.0	32
3	9	10.125	3	18	59	0.75	18	33	108	3.375	33
4	13	1.5	4	19	62	4.125	19	34	111	6.75	34
5	16	4.875	5	20	65	7.5	20	35	114	10.125	35
6	19	8.25	6	21	68	10.875	21	36	118	1.5	36
7	22	11.625	7	22	72	2.25	22	37	121	4.875	37
8	26	3.0	8	23	75	5.625	23	38	124	8.25	38
9	29	6.375	9	24	78	9.0	24	39	127	11.625	39
10	32	9.75	10	25	82	0.375	25	40	131	3.0	40
11	36	1.125	11	26	85	3.75	26	41	134	6.375	41
12	39	4.5	12	27	88	7.125	27	42	137	9.75	42
13	42	7.875	13	28	91	10.5	28	43	141	1.125	43
14	45	11.25	14	29	95	1.875	29	44	144	4.5	44
15	49	2.625	15	30	98	5.25	30	45	147	7.875	45


GABLE SHEET LENGTH

To determine number of sheets required, use preceding table.

Gable End with even number of sheets.
Use ends cut off sheets to cover second gable.



Gable End with odd number of sheets.
Use ends cut off sheets to cover second gable.

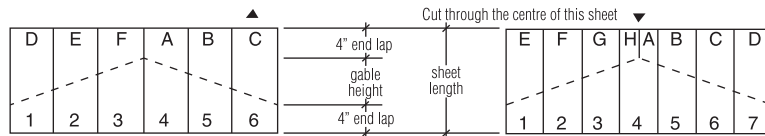

CONVERSION FACTORS

To Convert	Multiply by
Inches to millimeters	25.4
Millimeters to inches	0.03937
Feet to meters	0.3048
Meters to feet	3.281

To Convert	Multiply by
Sq. feet to sq. meters	0.0929
Sq. meters to sq. feet	10.76
Pounds to kilograms	0.4536
Kilograms to pounds	2.205



In accordance with ongoing efforts to improve our products and their performance, Vicwest Building Products reserves the right to change without notice the specifications contained herein.

The contents herein are for general information and illustrative purposes only and are not intended to serve as any type of advice. Every effort is made to ensure the accuracy of the information included in this brochure and it is believed that the information contained herein is accurate and reliable as of the date of publication. Vicwest Building Products, however, does not warrant or represent the accuracy or reliability of any information included in this brochure. Any reliance on any information without consultation with Vicwest Building Products or a duly authorized representative shall be at the user's own risk. © 2015 Vicwest Building Products - All rights reserved



VW00179EN03/15