




DR-36

Manufactured in Stratford, ON



Recommended
Overlap
Procedure



FINISH	MATERIAL GAUGE		LENGTH
	29*	28	
GALVALUME		•	3' to 36'
GALVANIZED		•	3' to 36'
PRE-PAINTED	•	•	3' to 36'

*Only available in Liner White 5712

STEEL:

- Galvanized and Galvalume
- Prepainted WeatherXL™ series (see Vicwest standard colours).



MATERIAL SPECIFICATIONS:


The steel used in the manufacture of DR-36 sheet meets the following specifications:

- ASTM A792 Grade E (latest revision) with designation AZ50 (AZM150) for Galvalume material.
- ASTM A653, Grade 80 (latest revision) with designation G90 (Z275) for Galvanized material.
- ASTM A653, Grade 80 (latest revision) with designation G90 (Z275) or AZ50 (AZM150) for prepainted Galvanized or Galvalume material.

A pleasing design consisting of seven main ribs 5/8" (16 mm) high, DR-36 is equally attractive whether installed vertically or horizontally and comes in a wide choice of attractive colours for versatile combinations. DR-36 is the profile to give your project the "Professional" look. A secure overlap design provides a tight hidden joint, ensuring superb weathertight performance.

STANDARD TRIMS

N.B.: Other products also available; see Flashings and Mouldings. *Measurement to be determined.

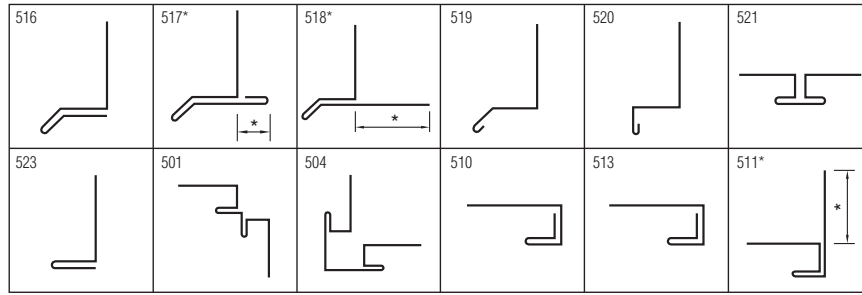

ESTIMATING CHART


Coverage @ 29 11/32" (0.745m) per sheet:

No. OF SHEETS	COVERAGE			No. OF SHEETS	COVERAGE			No. OF SHEETS	COVERAGE		
	FT.	INS.	M		FT.	INS.	M		FT.	INS.	M
1	3	0	0.914	16	48	0	14.63	31	93	0	28.35
2	6	0	1.829	17	51	0	15.54	32	96	0	29.26
3	9	0	2.743	18	54	0	16.46	33	99	0	30.18
4	12	0	3.658	19	57	0	17.37	34	102	0	31.09
5	15	0	4.572	20	60	0	18.29	35	105	0	32.00
6	18	0	5.486	21	63	0	19.20	36	108	0	32.92
7	21	0	6.401	22	66	0	20.12	37	111	0	33.83
8	24	0	7.315	23	69	0	21.03	38	114	0	34.75
9	27	0	8.230	24	72	0	21.95	39	117	0	35.66
10	30	0	9.144	25	75	0	22.86	40	120	0	36.58
11	33	0	10.058	26	78	0	23.77	41	123	0	37.49
12	36	0	10.973	27	81	0	24.69	42	126	0	38.40
13	39	0	11.887	28	84	0	25.60	43	129	0	39.32
14	42	0	12.80	29	87	0	26.52	44	132	0	40.23
15	45	0	13.72	30	90	0	27.43	45	135	0	41.14


GABLE SHEET LENGTH

To determine number of sheets required, use preceding table.

Gable End with even number of sheets.
Use ends cut off sheets to cover second gable.



Gable End with odd number of sheets.
Use ends cut off sheets to cover second gable.

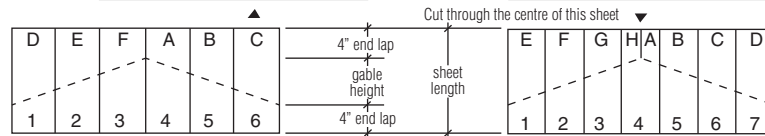

CONVERSION FACTORS

To Convert

Multiply by

To Convert

Multiply by

Inches to millimeters
Millimeters to inches
Feet to meters
Meters to feet

25.4
0.03937
0.3048
3.281

Sq. feet to sq. meters
Sq. meters to sq. feet
Pounds to kilograms
Kilograms to pounds

0.0929
10.76
0.4536
2.205



In accordance with ongoing efforts to improve our products and their performance, Vicwest Building Products reserves the right to change without notice the specifications contained herein.

The contents herein are for general information and illustrative purposes only and are not intended to serve as any type of advice. Every effort is made to ensure the accuracy of the information included in this brochure and it is believed that the information contained herein is accurate and reliable as of the date of publication. Vicwest Building Products, however, does not warrant or represent the accuracy or reliability of any information included in this brochure. Any reliance on any information without consultation with Vicwest Building Products or a duly authorized representative shall be at the user's own risk.

©2019, Vicwest Building Products – All rights reserved



VW00179EN10/19